

FEATURE

- Aluminum housing with high grade acrylic panel.
- Innovative, easy installation in minutes.
- Aluminum mounting plate allows top, back or end mount.
- Removable directional indicators.
- 120V-277VAC Universal voltage operation.
- Letter 6" height with 3/4" stroke. Super bright RED or GREEN LED lamps.
- Built-in 4.8 V 5 00mAh Ni-MH battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.

FAMILY: **JELB EX**

NOTES:

TYPE: **NEW EDGE-LIT EMERGENCY EXIT SIGN**




ORDERING INFORMATION

FAMILY	FACEPLATE	LENS	PANEL
JELBEX	1(SINGLE)	R(RED)	C(CLEAR)
	2(DOUBLE)	G(GREEN)	W(WHITE)
			M(MIRROR)

PACKING INFORMATION

MODEL NO.	PACKING INFORMATION	WEIGHTS
JELBEX1RC	39x32.5x20.5cm/6pcs	9.0/8.0kgs
JELBEX1GC	39x32.5x20.5cm/6pcs	9.0/8.0kgs
JELBEX1RM	39x32.5x20.5cm/6pcs	9.0/8.0kgs
JELBEX1GM	39x32.5x20.5cm/6pcs	9.0/8.0kgs
JELBEX2RM	39x32.5x20.5cm/6pcs	9.0/8.0kgs
JELBEX2GM	39x32.5x20.5cm/6pcs	9.0/8.0kgs

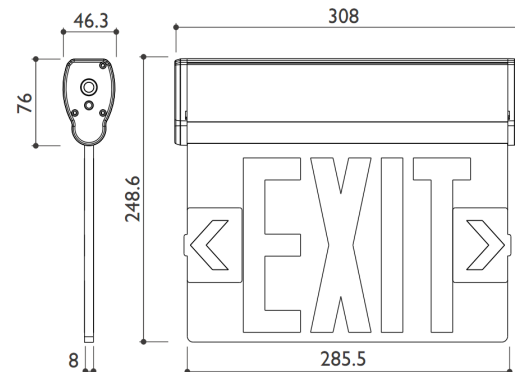

E464915



ELECTRICAL INFORMATION

MODEL	RATED VOLTAGE	INPUT CURRENT	INPUT WATT	LED TYPE	CHARGING TIME	EMERGENCY RUN TIME
JELEX1RC	120-277V	0.035-0.025A	2.5W	8Pcs Red LEDs	24 Hrs	90 Mins
JELEX1GC	120-277V	0.045-0.028A	3.0W	8Pcs Green LEDs	24 Hrs	90 Mins
JELEX2RM	120-277V	0.035-0.025A	2.5W	8Pcs Red LEDs	24 Hrs	90 Mins
JELEX2GM	120-277V	0.045-0.028A	3.0W	8Pcs Green LEDs	24 Hrs	90 Mins
JELEX2RM	120-277V	0.035-0.025A	2.5W	8Pcs Red LEDs	24 Hrs	90 Mins
JELEX2GM	120-277V	0.045-0.028A	3.0W	8Pcs Green LEDs	24 Hrs	90 Mins

NEW EDGE-LIT EMERGENCY EXIT SIGN

JELB EX